


## ELECTRONIC TURN SIGNAL FLASHER

### Features

- Standard or LED Bulbs
- Plugs Directly into Existing Vehicle 2-Prong or J50 3-Prong Type Connector\*
- Completely Electronic - 100% Solid State - No Relays or Moving Parts
- Adjustable Flash Rate
- High Current Capability - 15 Amps
- Sonalert® Audible Chirp Avoids Leaving Signal on in Noisy Environments
- Eliminates the Need for Additional Loading Resistors in LED Systems
- Every Unit Functionally Tested
- Textured Black ABS Enclosure†
- Simple Installation & Mounting
- Compact Size (2.5" x 2.5" x 1.25")
- 90 Day Limited Warranty

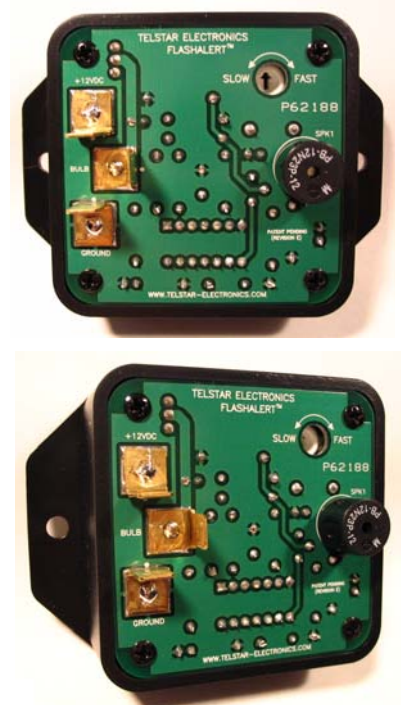

### Electrical Specifications

Operating Voltage	8 - 16V <sub>DC</sub>
Operating Current	10mA
Flash Rate (Adjustable)	60 - 130 (Per Minute)
Load Switching	20mA - 15A
Audible Frequency	2.3KHz
Audible Duration	50mS (Per Flash)
Flash Symmetry	50%
Operating Temperature Range	-40 to +180F

\* Not Intended to Directly Replace Fuse-Box Mounted Flashers

† Underwriters Laboratory UL94-5VA Rating

The FlashAlert has an implied warranty to be free of defects in materials and workmanship for a period of 90 days from purchase. This warranty covers workmanship, parts, and labor. If it's determined that the FlashAlert has been used for a purpose other than intended, abused, or altered in any way, the warranty shall be void.